




HIGH PRESSURE LIQUID CO₂ HOSE

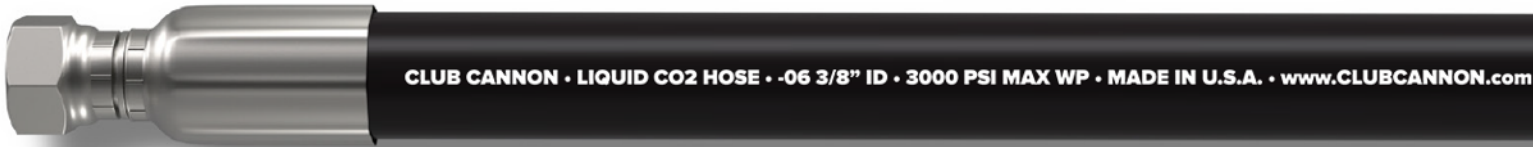

APPLICATIONS:

- High Pressure Applications
- Liquid CO₂ Applications
- Special Effects Applications

FEATURES:

- High Pressure Performance
- Steel Braid Guarantees Electrical Conductivity
- Wire Ensures Static Dissipation
- Wide Variety of Available Fittings
- Excellent Flexibility / Small Bend Radius
- Plasticizer Free Core Tube
- Core Tube is FDA Compliant
- Non-Stick, Low Friction Cover (75% Better)
- Superior Abrasion Resistant Cover (67% Better)

CONSTRUCTION:

- Tube - Polyolefin
- Reinforcement - One Wire Braid
- Cover - Low Friction Polyurethan
- Cover Color - Black, Perforated

TEMPERATURE:

- -40°F to + 150°F (-109°F Intermittent)
- -40°C to + 66°C (-78°C Intermittent)
- (Delta) Working Length @ WPSI: +/- 2% Max

Nominal ID	Maximum OD	Min Bend Radius	Max Working Pressure	Minimum Burst Pressure	Weight
IN / MM	IN / MM	IN / MM	PSI / BAR	PSI / BAR	100FT / 100M
3/8 · 10	0.630 · 16	2.0 · 51	3,000 · 207	12,000 · 828	17.5 · 26